



SLIDING SINGLE DOOR OPERATOR : AZ-SLD200



Optional Integration:



Features:

- o The microcomputer control system drives the motor and controls the door to operate in the set mode. Adopting European motor and gearbox integration technology, the drive is strong, the operation is stable
- o Compact Size, Nice Appearance and Modern Design
- o Special lubrication measures, special deceleration mute wheel, professionally designed hanging parts and roller structure greatly reduce the running noise.
- o Suitable for offices, homes, restaurants, etc., can be used with a variety of doors to meet a variety of needs.

Technical Data:


Door form	: single door
Loading weight	: 80kg
Door width	: 600-1200mm
Power supply	: AC 220V±10%, 50/60Hz
Rated power	: 40W
Opening speed	: 100-410mm/S (adjustable)
Closing speed	: 120-220mm/S (adjustable)
Opening time	: 0-20S (adjustable)
Environment temperature	: -20 ~ +70°C



SLIDING DOUBLE DOOR OPERATOR : AZ-SLD201



Optional Integration:

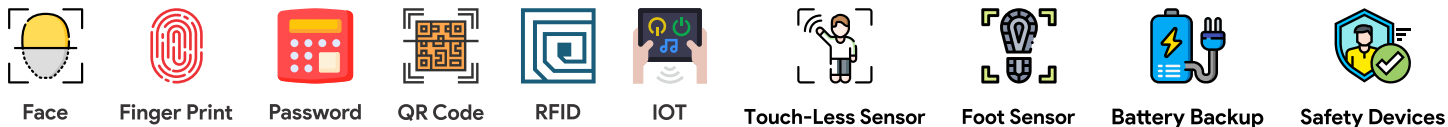

Features:

- o The microcomputer control system drives the motor and controls the door to operate in the set mode. Wide voltage power supply design, many interface such as double door interlock.
- o Adopting European motor and gearbox integration technology, the drive is strong, the operation is stable, the output power is improved, and it can adapt to the needs of larger doors.
- o Special lubrication measures, special deceleration mute wheel, professionally designed hanging parts and roller structure greatly reduce the running noise.
- o Every time there is a self-test procedure, the door will rebound when it encounters resistance, which fully guarantees the safety of the passers-by.
- o Suitable for office buildings, storefronts, banks, restaurants, hotels, shopping centers, laboratories, hospitals and other places.

Technical Data:

Door form:	single door/double door
Loading weight	: ≤1×150kg/≤2×125kg
Door width	: 750-1600mm/650-1250mm
Power supply	: AC220V, 50Hz
Power consumption	: 65W (125A), 50W (125B)
Opening speed	: 150-460mm/S (adjustable)
Closing speed	: 130-460mm/S (adjustable)
Open time	: 0-8s (adjustable)
Manual force	: <40N/<50N
Temperature range	: -20 ~ +50□