


MACHINE CORE STRUCTURE:

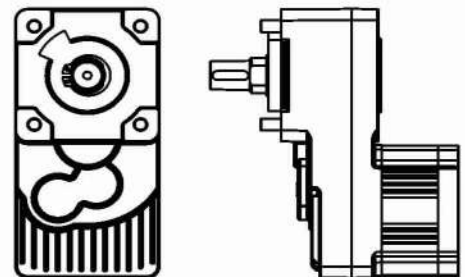

PRODUCT DESCRIPTION:

- o Unique and elegant design
- o Boom Barrier available up to 2 metres in arm length.
- o Brush less motor for high performance and noiseless operation.
- o Designed with galvanized steel cabinet with powder coat finish.
- o Can be controlled by radio transmitter, card reader, push button and loop detector
- o Suitable for shopping mall, industries, business centre, hotels, hospitals etc.,

RECOMMENDED ACCESSORIES:



AZ BLDCTX22
Transmitter



AZ PC 10
Photocell



AZ RFPC 417M
IP Reflector Photocell



AZ PB 16 A
Push Button



AZ KS 15
Key Switch



AZ LB 33
Loop Detector



AZ BB VH
V Holder



AZ FL 19
Flash Lamp



AZ RF WIFI 31A
Wifi Module



AZ GSM 30
GSM Module

FEATURES:



Operation speed as
fast as 3s



Embedded Boom
LED Light



Adjustable boom arm
angle of rise and fall



Automatic obstacle
detection



Anti-smashing
function



Automatic delay
closing

OPTIONAL INTEGRATION:



FACE
RECOGNITION



FINGER
PRINT



RFID



QR CODE



PASSWORD



IOT




SAFETY
DEVICES


TECHNICAL SPECIFICATIONS:

AZBBL113

Power Supply	220 V - 240 V AC
Motor power	BL DC 24 V / 60 W
Maximum straight boom length	3 Sec, 2 m 5 Sec, 2m
RPM	1500 r / min
Remote Distance	30 Mtr
Max Recording of Transmitter	20
Operation Cycle	5 Million
Working Duty	S1
Working temperature	-40°C ~ + 60°C
Housing dimension	140 * 110 * 812mm
Weight not including boom barrier	12 Kg
Protection class	IP 54

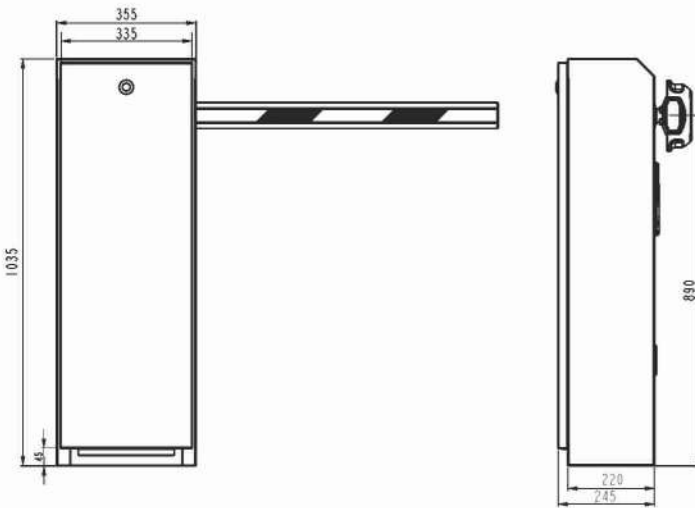

MACHINE CORE STRUCTURE:

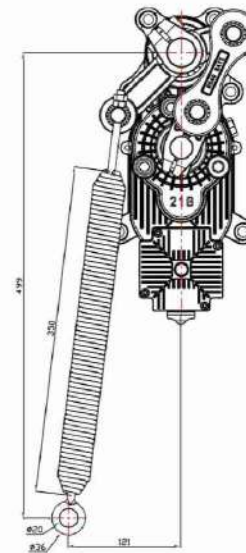

PRODUCT DESCRIPTION:

- o Boom Barrier is available up to 6 meters in arm length.
- o Extremely sensitive limit switch adapted to guarantee accurate motion of the arm.
- o Brush less motor for high performance and noiseless operation.
- o Arm can be manually raised incase of power failure
- o Can be controlled by radio transmitter, card reader, push button and loop detector
- o Suitable for residential, shopping mall, industries, business centre, hotels, hospitals etc.,

RECOMMENDED ACCESSORIES:



AZ BLDCTX22
Transmitter



AZ PC 10
Photocell



AZ RFPC 417M
IP Reflector Photocell



AZ PB 16 A
Push Button



AZ KS 15
Key Switch



AZ LB 33
Loop Detector



AZ BB VH
V Holder



AZ FL 19
Flash Lamp



AZ RF WIFI 31A
Wifi Module



AZ GSM 30
GSM Module

TYPES OF BOOM:



Telescopic Boom - AZ BT 01




LED Boom - AZ BL 07



Folding Boom 90° - AZ BF 05 90 D



Arm Out Boom - AZ BA 04

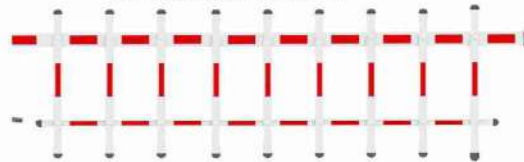

Fence Boom - AZ BF 03

OPTIONAL INTEGRATION:



FACE
RECOGNITION



FINGER
PRINT



RFID



QR CODE



PASSWORD



IOT




SAFETY
DEVICES


TECHNICAL SPECIFICATIONS:

AZBB114

Power Supply	220 V - 240 V AC
Motor power	BL DC 24V / 100W
Maximum straight boom length	3 Sec, 4 m 5 Sec, 6 m
RPM	1500 r / min
Remote Distance	30 Mtr
Max Recording of Transmitter	20
Operation Cycle	5 Million
Working Duty	S1
Working temperature	-40°C ~ + 60°C
Housing dimension	355 * 245 * 1035
Weight not including boom barrier	40 Kg
Protection class	Ip 54

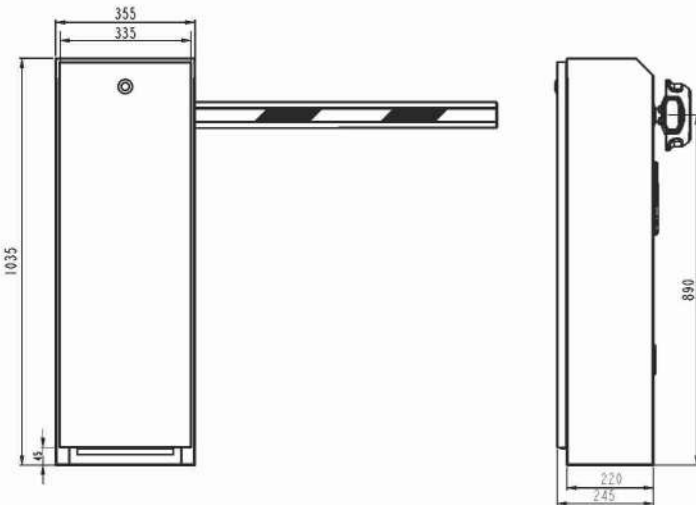

MACHINE CORE STRUCTURE:

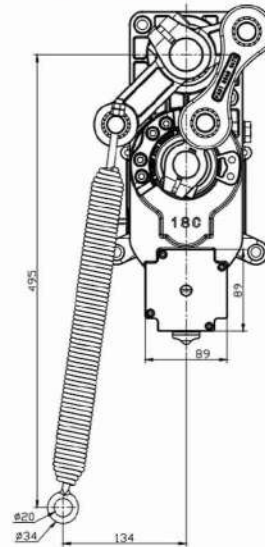

PRODUCT DESCRIPTION:

- o Boom Barrier available up to 6 metres in arm length.
- o Brush less motor for high performance and noiseless operation.
- o Designed with galvanized steel cabinet with powder coat finish.
- o Can be controlled by radio transmitter, card reader, push button and loop detector
- o Suitable for residential, shopping mall, industries, business centre, hotels, hospitals etc.,

RECOMMENDED ACCESSORIES:



AZ BLDCTX22
Transmitter



AZ PC 10
Photocell



AZ RFPC 43
Reflector Photocell



AZ PB 16 A
Push Button



AZ KS 15
Key Switch



AZ LB 33
Loop Detector



AZ BB VH
V Holder



AZ FL 19
Flash Lamp



AZ RF WIFI 31A
Wifi Module



AZ GSM 30
GSM Module

TYPES OF BOOM:



Telescopic Boom - AZ BT 01




LED Boom - AZ BL 07



Folding Boom 90° - AZ BF 05 90 D



Arm Out Boom - AZ BA 04

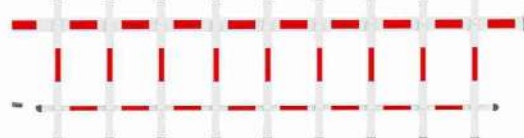

Fence Boom - AZ BF 03

OPTIONAL INTEGRATION:



FACE
RECOGNITION



FINGER
PRINT



RFID



QR CODE



PASSWORD



IOT




SAFETY
DEVICES


TECHNICAL SPECIFICATIONS:

AZBBL115

Power Supply	220 V - 240 V AC
Motor power	BL DC 24 V / 140 W
Maximum straight boom length	3 Sec, 4 m 5 Sec, 6 m
RPM	1500 r / min
Remote Distance	30 Mtr
Max Recording of Transmitter	20
Operation Cycle	7 Million
Working Duty	S1
Working temperature	-40°C ~ + 60°C
Housing dimension	355 * 245 * 1035
Weight not including boom barrier	41 Kg
Protection class	Ip 54

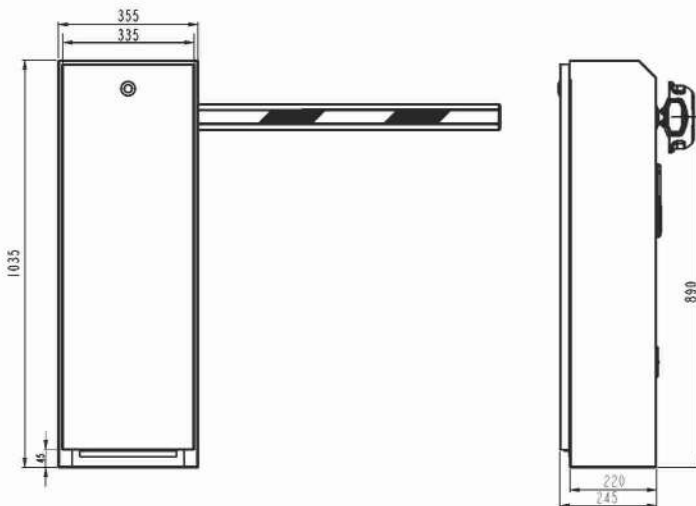

MACHINE CORE STRUCTURE:

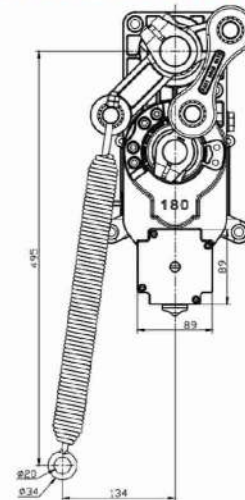

PRODUCT DESCRIPTION:

- o This Boom Barrier is used in Toll plaza, Malls, Public parking area.
- o Opened and closed within minimum time range of 0.3 s to 1.2 s
- o Very low operating cost due to efficient and long established Brush less motor
- o User-friendly with optimum accessibility
- o Designed for 10 million opening and closing process
- o Suitable for Toll plazas, malls, public parking etc.,

RECOMMENDED ACCESSORIES:



AZ BLDCTX22
Transmitter



AZ PC 10
Photocell



AZ RFPC 43
Reflector Photocell



AZ PB 16 A
Push Button



AZ KS 15
Key Switch



AZ LB 33
Loop Detector



AZ BB VH
V Holder



AZ FL 19
Flash Lamp



AZ RF WIFI 31 A
Wifi Module



AZ GSM 30
GSM Module

TYPES OF BOOM:



Telescopic Boom - AZ BT 01




LED Boom - AZ BL 07



Folding Boom 90° - AZ BF 05 90 D



Arm Out Boom - AZ BA 04

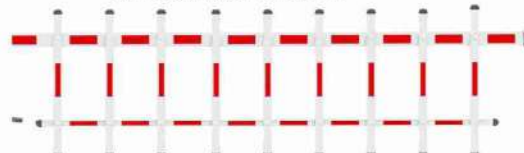

Fence Boom - AZ BF 03

OPTIONAL INTEGRATION:



FACE
RECOGNITION



FINGER
PRINT



RFID



QR CODE



PASSWORD



IOT




SAFETY
DEVICES

TECHNICAL SPECIFICATIONS:

AZBB116

Power Supply	220 V - 240 V AC
Motor power	BL DC 24 V / 140 W
Maximum straight boom length	0.3 Sec, 3 m 0.8 Sec, 3 m 1.2 Sec, 3 m
RPM	1500 r / min
Remote Distance	30 Mtr
Max Recording of Transmitter	20
Operation Cycle	7 Million
Working Duty	S1
Working temperature	-40°C ~ + 60°C
Housing dimension	355 * 245 * 1035
Weight not including boom barrier	41 Kg
Protection class	Ip 54

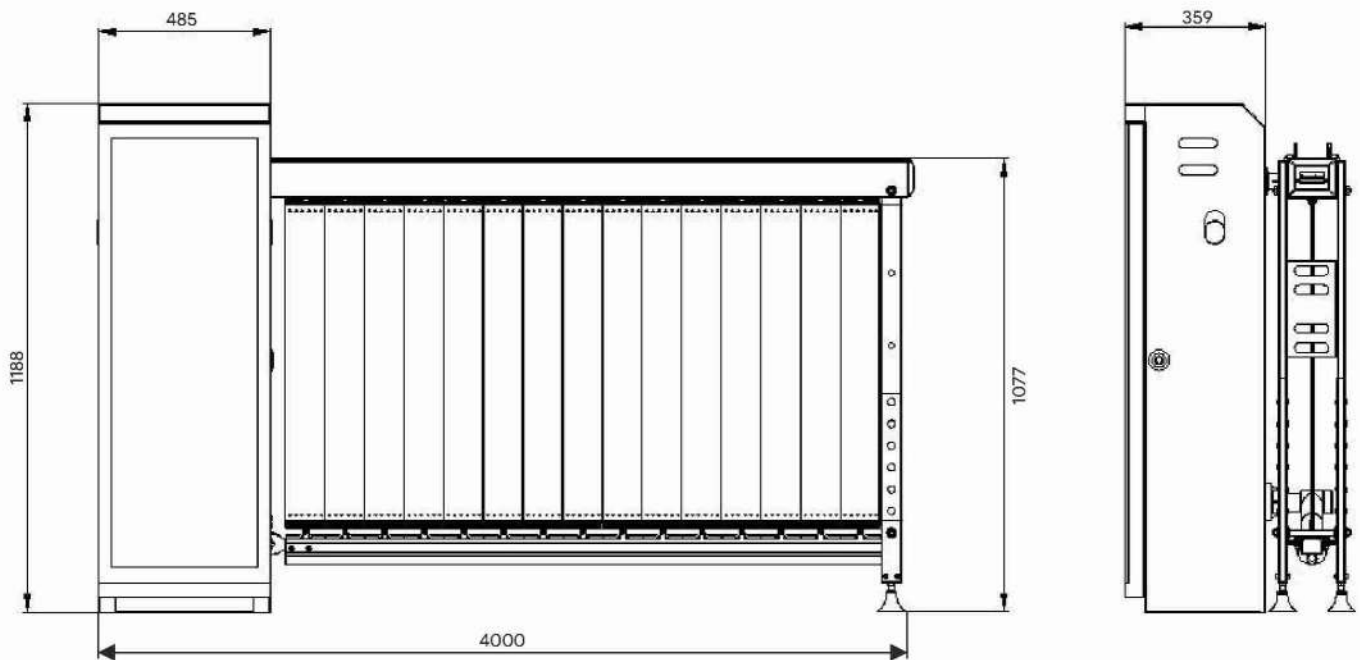

PRODUCT DESCRIPTION:

- o Boom plate turning while boom lifting, advertising function can be realized well
- o Mechanical Turning Structure can ensure boom plate turning automatically with wind-proof function
- o At Night, advertising is more attractive
- o Can be controlled by radio transmitter, card reader, push button, vehicle induction loop detector
- o Extremely sensitive limit switch adopted to accurate motion of the boom

RECOMMENDED ACCESSORIES:



AZ BLDC Tx22
Transmitter



AZ PC 10
Photocell



AZ RFPC 43
Reflector Photocell



AZ PB 16 A
Push Button



AZ KS 15
Key Switch



AZ LB 33
Loop Detector



AZ AF LAC 19A
Alarm Flash Lamp





AZ FL 19
Flash Lamp



AZ WIFI 31A
Wifi Module



AZ GSM 30
GSM Module

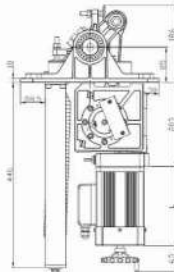

OPTIONAL INTEGRATION:



FACE
RECOGNITION



FINGER
PRINT



RFID



QR CODE



PASSWORD



IOT



SAFETY
DEVICES

TECHNICAL SPECIFICATIONS:

AZBBA11701

Power Supply	220 V - 240 V AC
Motor power	180 W
Maximum straight boom length	6 Sec, 4 m
RPM	1400 r / min
Remote Distance	30 Mtr
Max Recording of Transmitter	20
Operation Cycle	5 Million
Working Duty	S1
Working temperature	-40°C ~ + 60°C
Housing dimension	485 * 359 * 1188
Weight not including boom barrier	100 Kg
Protection class	Ip 54

AUTOZON®

ENTRANCE AUTOMATION

Our Range of Products:



SLIDING GATE OPERATOR



SWING GATE OPERATOR



SLIDING DOOR OPERATOR



SWING DOOR OPERATOR



CURTAIN OPERATOR



BLINDS OPERATOR



BOOM BARRIER



GARAGE DOOR & OPERATOR



ROLLING SHUTTER & OPERATOR



HIGH SPEED DOOR & OPERATOR



SECTIONAL DOOR & OPERATOR



RETRACTABLE GATE



BOLLARD



DOCK LEVELLER



GATE HARDWARES



ACCESSORIES

Applications:



RESIDENTIAL



INSTITUTION



PUBLIC PARKING



HOSPITAL



HOTEL



MALL



BUSINESS CENTER



WAREHOUSE



INDUSTRY

Corporate Office:

#308/1A, Rajeev Gandhi Road
Ganapathy, Coimbatore - 641 006
Tamil Nadu, INDIA

Chennai Branch Office:

No.3/14, 1st Cross Street, 1st Main Road,
Kalaimagal Nagar, Ekkatuthangal,
Chennai - 600032, Tamil Nadu, INDIA

Contact:

T : +91 75980 16000
M : +91 97872 55518

Contact:

T : 044 47100570
M : +91 9994929764



For more details:

Visit: www.autozonind.com | Email: info@autozonind.com

Sales & Service Network

Andhra Pradesh, Arunachal Pradesh, Assam, Bihar, Chhattisgarh, Goa, Gujarat, Haryana, Himachal Pradesh, Jharkhand, Karnataka, Kerala, Madhya Pradesh, Maharashtra, Manipur, Meghalaya, Mizoram, Nagaland, Odisha, Punjab, Rajasthan, Sikkim, Tamil Nadu, Telangana, Tripura, Uttar Pradesh, Uttarakhand, West Bengal



follow us on: [f](#) autozonind [@](#) autozonind [t](#) autozonind [c](#) autozonind