


MACHINE CORE STRUCTURE:

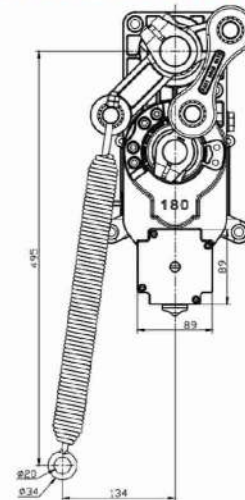

PRODUCT DESCRIPTION:

- o This Boom Barrier is used in Toll plaza, Malls, Public parking area.
- o Opened and closed within minimum time range of 0.3 s to 1.2 s
- o Very low operating cost due to efficient and long established Brush less motor
- o User-friendly with optimum accessibility
- o Designed for 10 million opening and closing process
- o Suitable for Toll plazas, malls, public parking etc.,

RECOMMENDED ACCESSORIES:



AZ BLDCTX22
Transmitter



AZ PC 10
Photocell



AZ RFPC 43
Reflector Photocell



AZ PB 16 A
Push Button



AZ KS 15
Key Switch



AZ LB 33
Loop Detector



AZ BB VH
V Holder



AZ FL 19
Flash Lamp



AZ RF WIFI 31 A
Wifi Module



AZ GSM 30
GSM Module

TYPES OF BOOM:



Telescopic Boom - AZ BT 01




LED Boom - AZ BL 07



Folding Boom 90° - AZ BF 05 90 D



Arm Out Boom - AZ BA 04

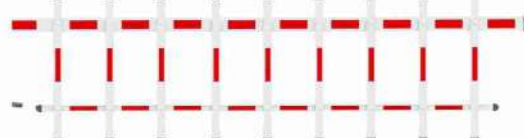

Fence Boom - AZ BF 03

OPTIONAL INTEGRATION:



FACE
RECOGNITION



FINGER
PRINT



RFID



QR CODE



PASSWORD



IOT



SAFETY
DEVICES

TECHNICAL SPECIFICATIONS:

AZBB116

Power Supply	220 V - 240 V AC
Motor power	BL DC 24 V / 140 W
Maximum straight boom length	0.3 Sec, 3 m 0.8 Sec, 3 m 1.2 Sec, 3 m
RPM	1500 r / min
Remote Distance	30 Mtr
Max Recording of Transmitter	20
Operation Cycle	7 Million
Working Duty	S1
Working temperature	-40°C ~ + 60°C
Housing dimension	355 * 245 * 1035
Weight not including boom barrier	41 Kg
Protection class	Ip 54