



PRODUCT DESCRIPTION:

- o Easy to install and maintain provided with long life.
- o Powerful, Less noise, less energy consumption.
- o Operator comes with resistance rebound function
- o Works with UPS control system.
- o In case of power failure, the UPS automatic power reserves, that can ensure motor run about 20 times in normal.
- o The UPS control system gets charged automatically.
- o Reserve power supply is used in batteries for universal product(4.5Ah/ 24V).

RECOMMENDED ACCESSORIES:



AZ RSDTX 02
Transmitter



AZ RSDC 01
Controller



AZ PC 10
Photocell



AZ RFPC 417M
IP Reflector Photocell



AZ KS 15 A
Key Switch



AZ RF WIFI 31 A
Wifi Module



AZ RSSB 01
Safety Break



AZ AF LAC 19A
Alarm Flash Lamp




AZ FL 19
Flash Lamp



AZ GSM 30
GSM Module

OPERATOR STRUCTURE:

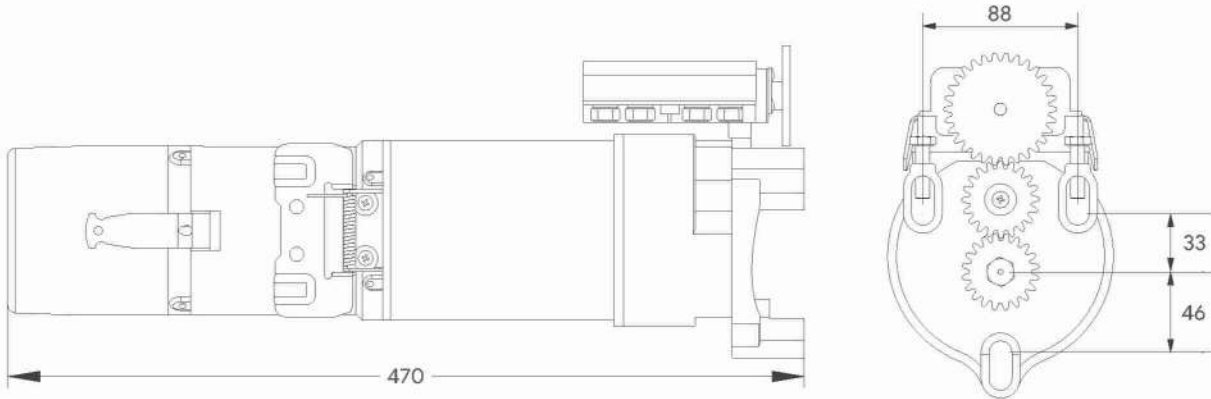

OPTIONAL INTEGRATION:



FACE
RECOGNITION



FINGER
PRINT



RFID



QR CODE



PASSWORD



IOT



SAFETY
DEVICES



BATTERY
BACKUP

TECHNICAL SPECIFICATIONS:

MODEL	INPUT VOLTAGE & FREQUENCY	RATED CURRENT	POWER (W)	OUTPUT TORQUE (n.m)	MAX LIFTING FORCE (Kg)	OUTPUT SPEED (RPM)	MAX RAISING HEIGHT (m)	TUBE DIAMETER (mm)	WORKING TIME (Min)	MOTOR & BRACKET WEIGHT (Kg)
AZRSDC400	220 V - 240 V AC	10	200	168	400	4.6	4.5	100	5	M 15 / B 12.7
AZRSDC600	220 V - 240 V AC	14	240	412	600	4.2	6	150	5	M 15.3 / B 14.5
AZRSDC800	220 V - 240 V AC	18	380	647	800	3.9	9	150	5	M 16.8 / B 18.5