




# SLIDING SINGLE GLASS DOOR OPERATOR AZSLD201E - 4.2 M / 6 M

# AUTOZON®

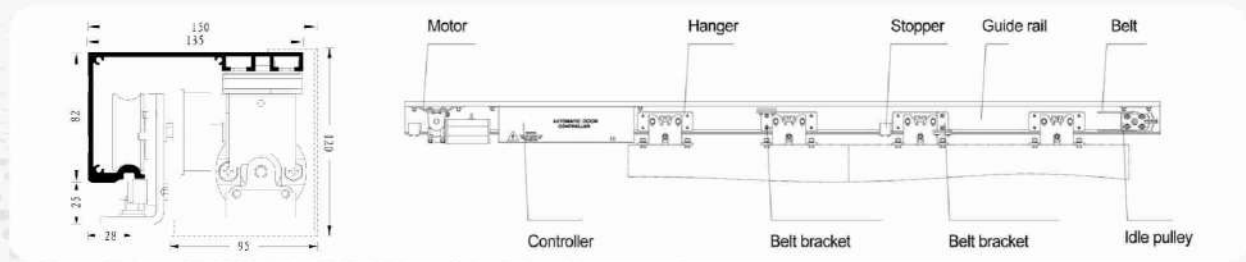

## PRODUCT DESCRIPTION:

- o AZSLD201E is Designed to suit heavy duty applications, this model can operate up to 120kg per leaf in a wide range of applications
- o The micro control system drives the motor and controls the door to operate in the set mode. Wide voltage power supply design, many interface such as double door interlock.
- o With application of European motor and gearbox integration technology, the drive is made with stability in operation, improved strong output, and it can adapt to the needs of larger doors.
- o Special lubrication measures, special deceleration mute wheel, professionally designed hanging parts and roller structure greatly reduce the running noise.
- o Every time there is a self-test procedure, the door will rebound when it encounters resistance, which guarantees the safety of the passers-by.
- o Suitable for office buildings, storefronts, banks, restaurants, hotels, shopping centres, laboratories, hospitals, etc.,



# SLIDING SINGLE GLASS DOOR OPERATOR AZSLD201E - 4.2 M / 6 M

# AUTOZON®

## RECOMMENDED ACCESSORIES:



AZ MRS 68  
Microwave Sensor



AZ OMS 68 01  
Microwave Sensor



AZ SLDRIS68 02  
Microwave & Infrared Sensor



AZ SLD SBP 71  
Photo Cell



AZ SWD KS 430  
Keypad



AZ SLD TLS 73  
Wired Touchless Sensor



AZ SLD WLTS 74  
Wireless Touchless Sensor



AZ SLD PB WL 70  
Wireless Push Button & Receiver



AZ FS 92  
Foot Sensor



AZ RF WIFI 31 A  
Wifi Module

## STANDARD COMPONENTS:



Controller



Motor



Hanger



Stopper



Glass Clamp



Idle Pulley

## OPTIONAL INTEGRATION:



FACE  
RECOGNITION



FINGER  
PRINT



RFID



QR CODE



PASSWORD



IOT



TOUCHLESS  
SENSOR



SAFETY  
DEVICES



BATTERY  
BACKUP

## TECHNICAL SPECIFICATIONS:

AZSLD201E - 4.2 M / 6 M

Door type	Single Door / Double Door
Loading weight	$\leq 1 \times 150 \text{ kg}$ / $\leq 2 \times 125 \text{ kg}$
Door width	600-1800 mm / 1000-3000 mm
Power Supply	220 V - 240 V AC
Motor Power	24 V BL DC / 65 W
Opening speed	200-500 mm/s (adjustable)
Closing speed	200-500 mm/s (adjustable)
Opening time	0-9 s (adjustable)
Manual Force	<30 N / <40 N
Environment temperature	-20 ~ +50°C
Track Width	4.2 M & 6 M
Weight	33 Kg & 42.5Kg