



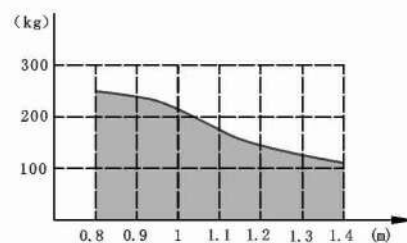

SWING DOOR OPERATOR AZSWD203UG

AUTOZON®

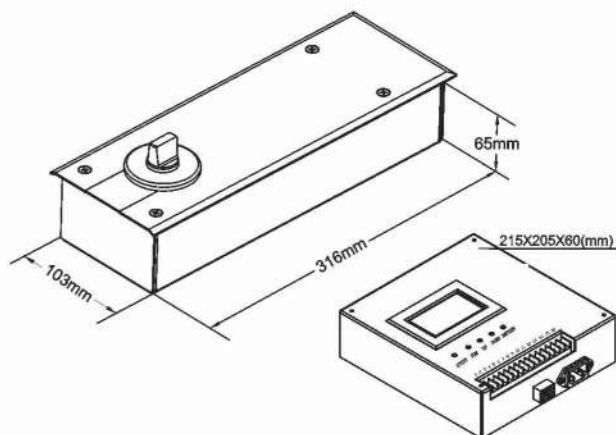

PRODUCT DESCRIPTION:

- o The controller has display debugging interface, which aids in easy operation and is equipped with function parts such as electric lock & backup battery.
- o The case of the machine is injection moulded by BMC. All DC motors are sealed to be super waterproof, fireproof and corrosion resistant.
- o The Max. load is 150KG, the unit can be opened at 90 degrees (automatically sense the passing direction of pedestrians, and opening the door with the pedestrian walking direction).
- o It is resistant to both low and high temperature and can work between the ranges of -20~ + 50°C environment.
- o Small size, waterproof, heavy load, easy construction, etc., can be used both indoor and outdoor.



SWING DOOR OPERATOR AZSWD203UG

AUTOZON®

RECOMMENDED ACCESSORIES:



AZ MRS 68
Microwave Sensor




AZ OMS 68 01
Microwave Sensor



AZ SLDRIS68 02
Microwave & Infrared Sensor



AZ SWDSS 95
Safety Sensor



Remote



AZ SLD TLS 73
Wired Touchless Sensor



AZ SLD WLTS 74
Wireless Touchless Sensor



AZ SLD PB WL 70 A
Wireless Push Button & Receiver




AZ FS 92
Foot Sensor




AZ RF WIFI 31 A
Wifi Module


STANDARD COMPONENTS



Top Brackets



Bottom Brackets



Rotating Arm

OPTIONAL INTEGRATION:



FACE
RECOGNITION



FINGER
PRINT



RFID



QR CODE



PASSWORD



IOT



TOUCHLESS
SENSOR



SAFETY
DEVICES



BATTERY
BACKUP

TECHNICAL SPECIFICATIONS:

AZSWD203UG

Power supply	220 V - 240 V AC
Motor power	24 V BL DC / 55 W
Max. door weight	150 kg
Max. door width	1200 mm
Max. torque	165 Nm
Running noise	<60 dB
Electric lock output	DC 12 V NO / NC
Opening /Closing time	6-12 s
Opening range	86°- 95°
Working temperature	-20 ~ +50°C
Protection level	IP68
Unit weight	5.5 Kg