

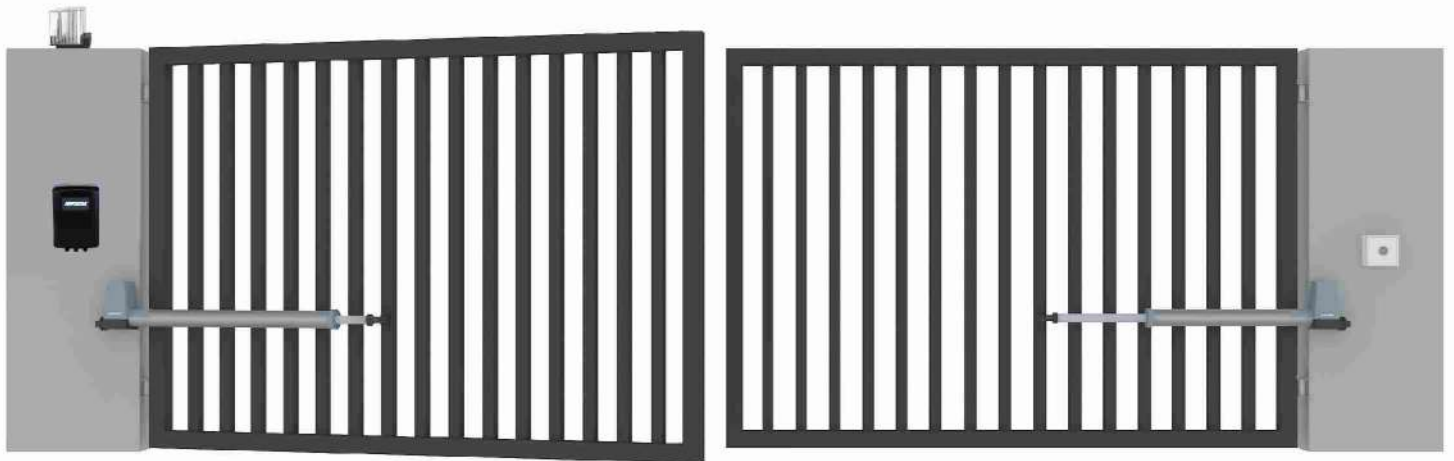


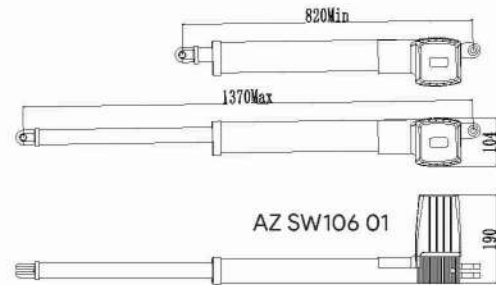

SWING GATE OPERATOR AZSW106 02 / AZSW106 01

AUTOZON®

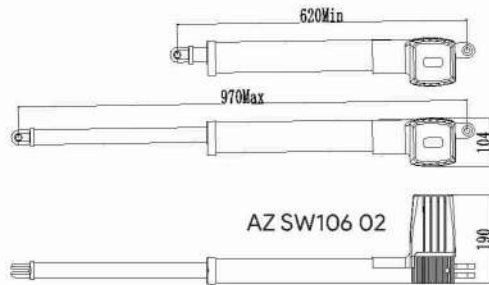

PRODUCT DESCRIPTION:

- o The swing gate operator is applicable for all gates with the weight of the single-leaf gate up to 300 kg and the width of each swing gate should be 2.5m/3m
- o The drive mode adopts the worm and worm gear to combine the screw rod transmission.
- o Microprocessor control unit with a wide variety of setting options, such as pedestrian leaf function, automatic closing of the gate, etc.
- o Operator can be manually unlocked in any position (e.g. in the event of a power failure)
- o Soft start and Soft stop
- o Connections for safety devices, such as warning light and photocell as well as for an external device (DC 24 V), potential-free relay contact
- o Fast installation and also provided with easy electrical connection



SWING GATE OPERATOR AZSW106 02 / AZSW106 01

AUTOZON®

RECOMMENDED ACCESSORIES:



AZ T21W
Transmitter



AZ T22
Transmitter



AZ PC 10
Photocell



AZ PCW L11
Wireless Photocell



AZ KS 15
Key Switch



AZ WLKP 17
Wireless Keypad



AZ FL 19
Flash Lamp



AZ RF WIFI 31 A
Wifi Module



AZ GSM 30
GSM Module



AZ EL32
Electronic Lock



AZ SLSP 319
Solar Kit



AZ CSVC 217
Car Sun Visor Clip

GATE HARDWARE:



Hinges with
Bearing



Pivot Hinges with
Roller Bearing



Adjustable Gate Hinges
with Round plate



Bi Folding
Bearing Hinges



Rotating Bearing
Wheel



Gate Stopper
for Two Leaf Gate



Gate
Stopper

OPTIONAL INTEGRATION:



FACE
RECOGNITION



FINGER
PRINT



RFID



QR CODE



PASSWORD



IOT



GSM



SAFETY
DEVICES



BATTERY
BACKUP

TECHNICAL SPECIFICATIONS:

AZSW106 02

AZSW106 01

Power supply	220 V - 240 V AC	220 V - 240 V AC
Motor power	80 W * 2 nos	80 W * 2 nos
Motor Voltage	24 V DC	24 V DC
Maximum weight of gate	300+ 300 Kg	300+ 300 Kg
Maximum leaf length	2.5 M + 2.5 M	3 M + 3 M
Maximum piston stroke	340 mm	540 mm
Maximum force	1500 N	1500 N
Opening time	18° / s ~ 22° / s	18° / s ~ 22° / s
Remote control distance	≥ 30 m	≥ 30 m
Max Recording of Transmitter	25 nos	25 nos
Working Duty	S2, 30 min	S2, 30 min
Working temperature	-20°C ~ +70°C	-20°C ~ +70°C
Protection Class	IP 54	IP 54
Product Weight	17 Kg	19 Kg