



Gate width and weight:

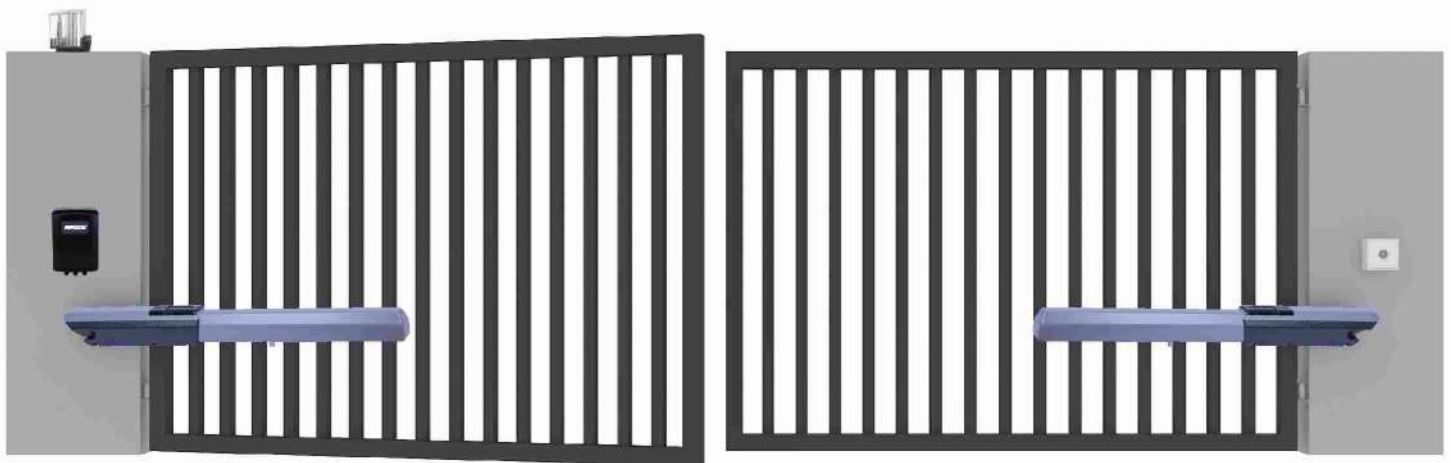

PRODUCT DESCRIPTION:

- o AZ SW112 Swing Gate Operator is applicable for operation of gates with the weight of single leaf gate up to 400 kg and width up to 5 m.
- o The lead screw with high steel strength has improved the kinematic characteristics; telescopic lever system; smooth ride, etc.,
- o Integrated micro switch limit to open and close the gate
- o The operator can be used for the left or right gate
- o Microprocessor control unit with a wide variety of setting options, such as pedestrian leaf function, automatic closing of the gate, etc.
- o Operator can be manually unlocked in any position (e.g. in the event of a power failure)
- o Connections for safety devices, such as warning light and photocell, as well as for an external device (DC 24 V), relay contact without potential
- o Fast installation and also provided with easy electrical connection



SWING GATE OPERATOR AZSW112

AUTOZON®

RECOMMENDED ACCESSORIES:



AZ T21W
Transmitter



AZ T22
Transmitter



AZ PC 10
Photocell



AZ PCW L11
Wireless Photocell



AZ RFPC 417M
IP Reflector Photocell



AZ KS 15
Key Switch



AZ WLKP 17
Wireless Keypad



AZ FL 19
Flash Lamp



AZ RF WIFI 31 A
Wifi Module



AZ GSM 30
GSM Module



AZ EL32
Electronic Lock



AZ CSVK 217
Car Sun Visor Clip

GATE HARDWARE:



Hinges with
Bearing



Pivot Hinges with
Roller Bearing




Adjustable Gate Hinges
with Round plate



Bi Folding
Bearing Hinges



Rotating Bearing
Wheel



Gate Stopper
for Two Leaf Gate



Gate
Stopper

OPTIONAL INTEGRATION:



FACE
RECOGNITION



FINGER
PRINT



RFID



QR CODE



PASSWORD



IOT



GSM



SAFETY
DEVICES

TECHNICAL SPECIFICATIONS:

AZSW112

Power supply	220 V - 240 V AC
Motor power	150 W * 2 nos
Motor Voltage	230 V AC
Maximum weight of Single Leaf Gate	400 - 1000 Kg
Maximum length of Single Leaf Gate	2 - 5 M
Maximum piston stroke	500 mm
Maximum force	3000 N
Traveling Time	17 s
Remote control distance	≥ 30 m
Max Recording of Transmitter	40
Working Duty	S4
Working temperature	-20°C ~ +70°C
Protection Class	IP 54
Product Weight	30 Kg