



PRODUCT DESCRIPTION:

- o The AUTOZON Fire rated rolling shutter operator designed especially for fire shutters.
- o Compact design , powerful drives, safe & reliable performance.
- o Control box can be connected to any fire or smoke detection system or can be equipped with stand-alone smoke detectors.
- o “Thermal Fusible Link” is an inbuilt option.
- o Stable and reliable braking, accurate limited control positioning with double limit switch protection.
- o Auto-Close function incase of fire incidents
- o Manual operation incase of power failure.

RECOMMENDED ACCESSORIES:



AZ RFRC 01
Controller



AZ RFRK 02
Key Pad



AZ RFRT 03
Thermal Fusible link



AZ RFRS 04
Smoke Sensor



AZ RFRH 05
Heat Sensor



AZ RFPC 43 15M
Reflector Photocell



AZ RSSB 01
Safety Break



AZ AF LAC 19A
Alarm Flash Lamp




AZ KS 15 A
Key Switch



AZ RF WIFI 31 A
Wifi Module

MACHINE CORE STRUCTURE:

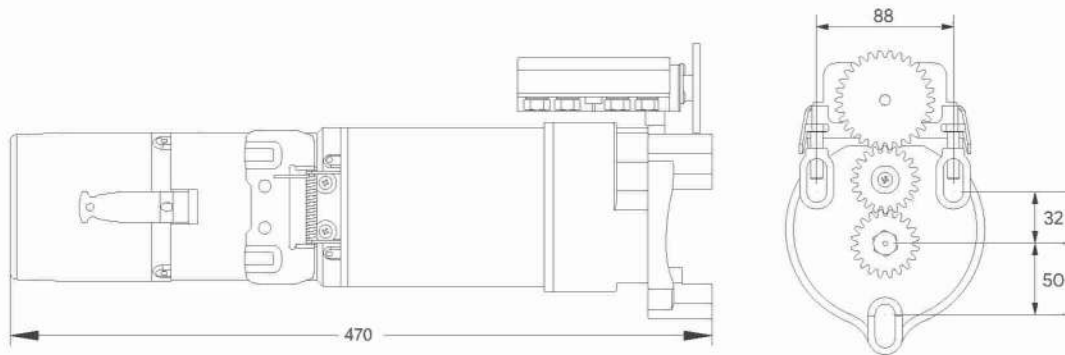

OPTIONAL INTEGRATION:



FACE
RECOGNITION



FINGER
PRINT



RFID



QR CODE



PASSWORD



IOT



SAFETY
DEVICES

TECHNICAL SPECIFICATIONS:

MODEL	VOLTAGE	POWER (W)	LIFTING POWER (KG)	OUTPUT TORQUE (N.m)	OUTPUT SPEED (R/Min)	LIFTING HEIGHT (M)	STANDARD TUBE DIAMETER (Mm)	MOTOR & BRACKET WEIGHT (Kg)
AZRSFR300	380 V - 420 V AC	180	300	168	6.5	6	100	M 11.8 / B 14.6
AZRSFR600	380 V - 420 V AC	250	600	420	6.5	6	150	M 12.4 / B 14.6
AZRSFR800	380 V - 420 V AC	550	800	647	4.8	9	150	M 16.1 / B 19
AZRSFR1000	380 V - 420 V AC	550	1000	809	4.4	9	150	M 16.4 / B 26.4
AZRSFR1300	380 V - 420 V AC	600	1300	1401	5.2	9	200	M 23.2 / B 30.3
AZRSFR1500	380 V - 420 V AC	800	1500	1617	4.8	9	200	M 24.5 / B 39.5